

8MP All-In-One PTZ Camera (TV-VC4KBT-Fx2M1S) T29872-A

FEATURES

- 8MP USB 4K PTZ Video Conference Camera.
- USB2.0 interface, driver-free, plug and play.
- Supports software such as Good view, CISCO, Vidyo, Skype, Webex, etc.
- Stable operation, low noise.
- Support all-round remote control reception, not restricted by the installation location.
- Support automatic identification of control protocol, users do not need to set.
- Support 18x zoom , visual distance up to 50M range.
- Support RS485 control, the longest distance can reach 1200M.


 4K
Video

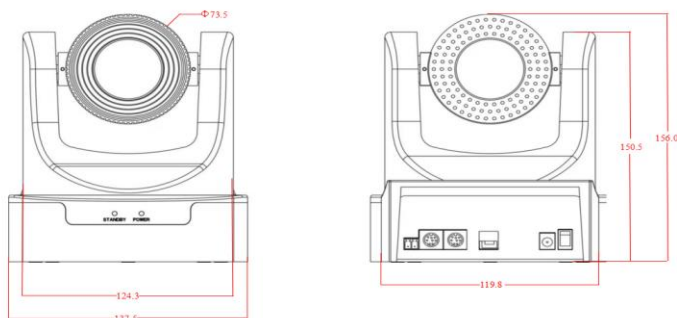
 Plug &
Play

 18X Digital
Zoom

 Pan/
Tilt

Technical Sepcification

Sensor	1/2.9 "CMOS
Effective Pixels	4K
Resolution	2160P, 1440P, 1080P, 720P, 600P, 480P, 360P Different resolutions according to different color spaces/compressions
Lens Focal Length	F=4.7mm~47mm
Lens Zoom	10X Optical + 8X Digital Zoom
BLC	Support
Field of View	Wide /69.5°~7.95°, Tele /35°~3.97°
Scan	Line-by-Line Scan
Minimum Illumination	2.4 lux
Focusing Method	Auto / Manual
Video Output	USB2.0
Commuication Port	RS485; RS232IN; RS232OUT; PELCOD-D, PELCOD-P Auto Recognition
Horizontal Pan rotation	0°~355°
Horizontal Tilt rotation	-35° ~+135°
Vertical Pan speed	0.1~100°/s
Vertical Tilt speed	0.1~50°/s
Preset	10 presets via remote controller
Preset Accuracy	0.1°
Horizontal/Vertical Flip	Support Horizontal/Vertical Flip
Color Space/Compression	MJPEG,YUY2, H.264
Video Format	MJPEG: Max 2160@30fps; H.264: Max 2160@30fps
USB video Communication Protocol	UVC1.1
UVC PTZ Control	Support
Noise Reduction	3D Digital Noise Reduction
White Balance	Auto
Electronic Shutter	Electronic Rolling Shutter
Use environment	Indoor
Power Supply	DC IN 12V-2A
Power consumption	≤10W
Stored Temperature	20%~80%
Range of Working Temperature	-15°C~+50°C
Weight	NW: 1.284 Kg, GW: 2 Kg
Camera Dimension	160mm (W) × 137.5mm (D) × 156mm (H)
Accessories	Remote, Touch Cable, Power Cable

Technical Diagram


* Note: Product specifications are subject to change without prior notice.