


43 inch Floor Mount Non-Touch A9 DSS 2GB/ 16GB T291098-A

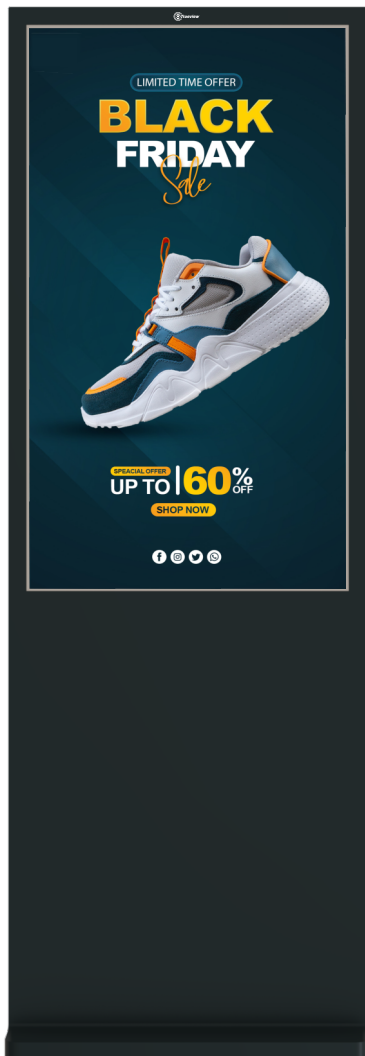

Android 9.0
Version

FEATURES

- Information can be broadcast, news released, products advertised, etc., digital signage, which is widely used in the fields of entertainment, finance, and traffic.
- Mobile application Based Content push Over the local Wi-Fi Network
- cloud-based software solution that brings together content management and remote device management capabilities, allowing users to remotely manage hardware settings and troubleshoot issues while effortlessly creating and deploying content with no previous training needed.
- Metallic Body Appearance
Light weight body with integrative design.
- Variable Materials
Static and dynamic materials, including pictures, Audio, Video, Scrolling Subtitle, PDF, Webpage, Live Video, pop-up pictures, etc.
- Flexible Program Schedule
 - > Free schedule and district display of multiple material.
 - > Multiple play modes with customization support.
- Centralized Management
 - > Remotely control and manage one or more screens, such as timed startup/shutdown, quick startup/shutdown, brightness/volume timed adjustment, and screenshot preview.
 - > Remote program release and local (USB) program update.
- Organization Permission
 - > 5-level organization available for managing materials, programs, terminals, and users.
 - > Create custom user with precise permission assignment. Multiple permission templates available.
- Multiple Security Safeguards
 - > 3-level check of materials, programs, and schedules to prevent mistake release. Screen saver password to protect displaying.
 - > Encryption of data storage and transmission to avoid data tampering.
 - > With no default password, users can activate and set initial password to guarantee the password safety.
- > DSS Management Software to manage <2000pcs DSS Players



HD



Viewing
Angle



Android
OS



Remote
Access



Power
Saving




Mobile
Data Push






Technical Specification

DISPLAY


Diagonal Size	43 inch
Resolution	1920 x 1080
Display Orientation	Portrait
Screen Type	TFT LCD (E-LED Backlight)
Aspect Ratio	16:9
Display Area	940.89(V) × 529.25(H)
LCD Viewing Angle	178°
LCD Refresh Rate(Panel)	≥8.5ms
LED Lifespan	50,000hours,
Working Hours	7x16Hrs
Contrast Ratio	4000:1(Typ)
Brightness	≥350cd/m ² ±10%



COMPUTING		
Android OS		9
RAM		2GB
Internal Storage		16GB
CPU		Hi352,Quad core, 32Bit, Cortex-A53 CPU,2.30GHz
GPU		ARM MaliTM-450
OSD Language		English, Arabic, Spanish, French, Italian, Japanese, Portuguese, Russian, etc
Video Format		Supports H.264/MVC/MPEG1/MPEG2/MPEG4/AVS+(AVS-P16)/VC-1/VP6/8 "1080P@60fps Video decoding; support, VP9 10bit, FHD@60fps Video decoding; Supports low latency video decoding
Audio Format		MPEG L1/L2;MP3;AAC_LC;HE_AACV2;LPCM;APE ; FLAC ; Ogg ; AMR-NB/WB ; G.711 Supports JPEG hardware decoding, with a maximum support of 64 million pixels; Support
Picture Format		"MJPEG Baseline decoding; Supported formats: 400/420/411/422/422T/444"
INPUT PORT		
HDMI IN		1
USB		2 (USB2.0)
AUDIO		
Dual Speakers		2 X 5W
NETWORK		
LAN in(RJ45)		10/100Mbps
Wake-on-LAN		Yes
Wi-Fi		IEEE802.11a/b/g, 2.4G
POWER		
Power Requirements		100V~240V AC, 50/60Hz
Power Consumption		75W
Power Consumption(Standby)		0.5W
Ultra-Quiet Fanless Design		Yes
ENVIROMENTAL		
Operating Temperature		0°C to 40°C(32°F to 104°F)
Storage Temperature		-15° to 55°C(-5°F to 131°F)
Operating Humidity		20% to 80% non-condensing humidity
Storage Humidity		20% to 90% non-condensing humidity
DIMENSION		
Product Dimension		Body : 599.1 mm (W) x 1742.8mm (H) x 80.2mm (D), Floor Stand Set :539.1mm(W) x 950.6 mm (H) x 30mm(D)
PACKED CONTENTS		
Accessories		1 x Remote Controller, 2 x Key , 1 x Power Cable (Fixed With Device),



TECHNICAL DIMENSION:

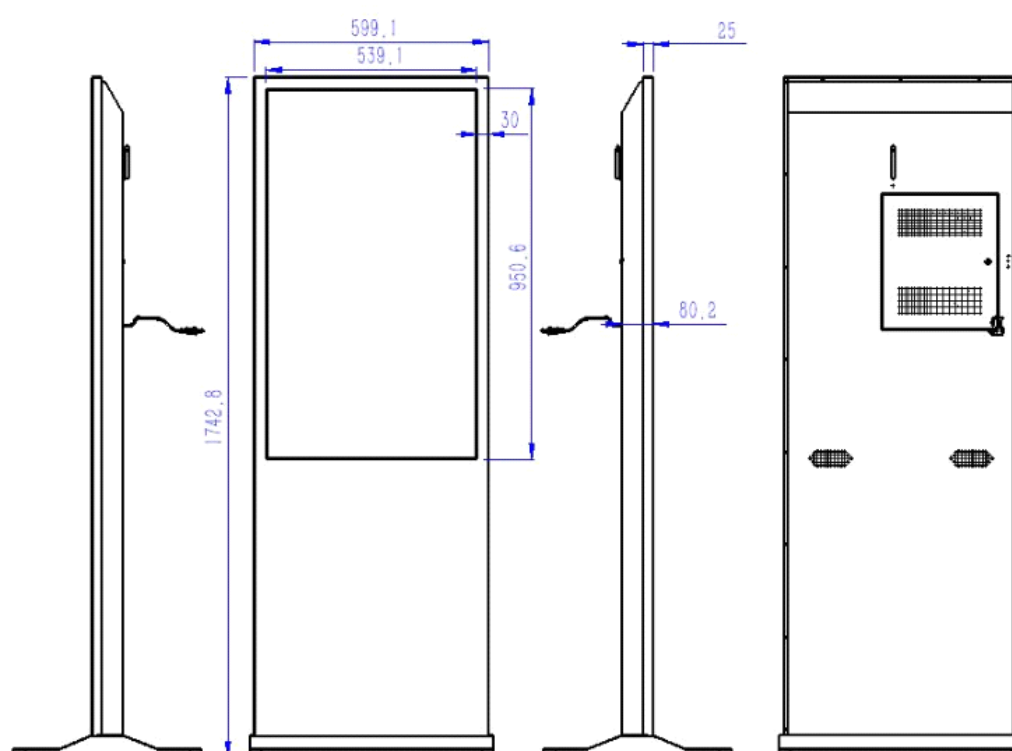

* Note: we will not inform the modify or upgrade of products.

Unit:mm