

# 55 inch WALL Mount Non-Touch A9 DSS 2GB/ 16GB T291096-A



## FEATURES

- Web Based Interface
- Full HD Display Panel
- Portrait & Landscape Installation
- Mobile application Based Contain push Over the local Wi-Fi Network

## Cloud Based Content Management Software

- Variable Materials
  - Static and dynamic materials, including pictures, Audio, Video, Scrolling Subtitle, PDF, Webpage, Live Video, pop-up pictures, etc.
- Flexible Program Schedule
  - Free schedule and district display of multiple material.
  - Multiple play modes with customization support.
- Centralized Management
  - Remotely control and manage one or more screens, such as timed startup/shutdown, quick startup/shutdown, brightness/volume timed adjustment, and screenshot preview.
  - Remote program release and local (USB) program update.
- Organization Permission
  - 5-level organization available for managing materials, programs, terminals, and users.
  - Create custom user with precise permission assignment. Multiple permission templates available.
- Multiple Security Safeguards
  - 3-level check of materials, programs, and schedules to prevent mistake release. Screen saver password to protect displaying.
  - Encryption of data storage and transmission to avoid data tampering.
  - With no default password, users can activate and set initial password to guarantee the password safety.
  - DSS Management Software to manage <2000pcs DSS Players



Android 9.0  
Version



HD



Viewing  
Angle



Android  
OS



Remote  
Access



Power  
Saving



Mobile  
Data Push


## Technical Specification

### DISPLAY

Diagonal Size	55 inch
Resolution	1920 x 1080
Display Orientation	Landscape or Portrait
Screen Type	TFT LCD (E-LED Backlight)
Aspect Ratio	16:9
Display Area	1209.6mm (V) X 680.4mm (H)
LCD Viewing Angle	178°
LCD Refresh Rate(Panel)	≤8.5ms
LED Lifespan	50,000* hours,
Working Hours	16x7 Hrs
Contrast Ratio	4000:1(Typ)
Brightness	≥350cd/m <sup>2</sup> ±10%

<b>COMPUTING</b>		
Android OS		9
RAM		2GB
Internal Storage		16GB
CPU		Hi352,Quad core, 32Bit, Cortex-A53 CPU,2.30GHz
GPU		ARM MaliTM-450
OSD Language		English, Hindi And Other Languages
Video Format		Supports H.264/MVC/MPEG1/MPEG2/MPEG4/AVS+(AVS-P16)/VC-1/VP6/8 "1080P@60fps Video decoding; support, VP9 10bit, FHD@60fps Video decoding; Supports low latency video decoding
Audio Format		MPEG L1/L2;MP3;AAC_LC;HE_AACV2;LPCM;APE ; FLAC ; Ogg ; AMR-NB/WB ; G.711
		Supports JPEG hardware decoding, with a maximum support of 64 million pixels; Support
Picture Format		MJPEG Baseline decoding; Supported formats: 400/420/411/422/422T/444
<b>I/O PORT</b>		
RJ45		1
HDMI IN		1
USB		2 (USB2.0)
<b>AUDIO</b>		
Dual Speakers		2 X 5W
<b>NETWORK</b>		
LAN in(RJ45)		10/100Mbps
Wake-on-LAN		Yes
Wi-Fi		IEEE802.11a/b/g, 2.4G
<b>POWER</b>		
Power Requirements		100V~240V AC, 50/60Hz
Power Consumption		≤ 55W
Power Consumption(Standby)		≤ 0.5W
Ultra-Quiet Fanless Design		Yes
<b>ENVIROMENTAL</b>		
Operating Temperature		0°C to 40°C (32°F to 104°F)
Storage Temperature		-10° to 60°C (-5°F to 131°F)
Operating Humidity		20% to 85% non-condensing humidity
Storage Humidity		10% to 60% non-condensing humidity
<b>PHYSICAL SPECIFICATIONS</b>		
Product Dimension		Body:1249.8(W) x 726.9(H) x 70.4(D)mm Without wall mount bracket
Gross Weight		14.5kg
<b>PACKED CONTENTS</b>		
Accessories		1 x Remote Controller, 1 x Wall Mount Bracket, 1 x Power Cable (Fixed With Device )

TECHNICAL DIAGRAM :

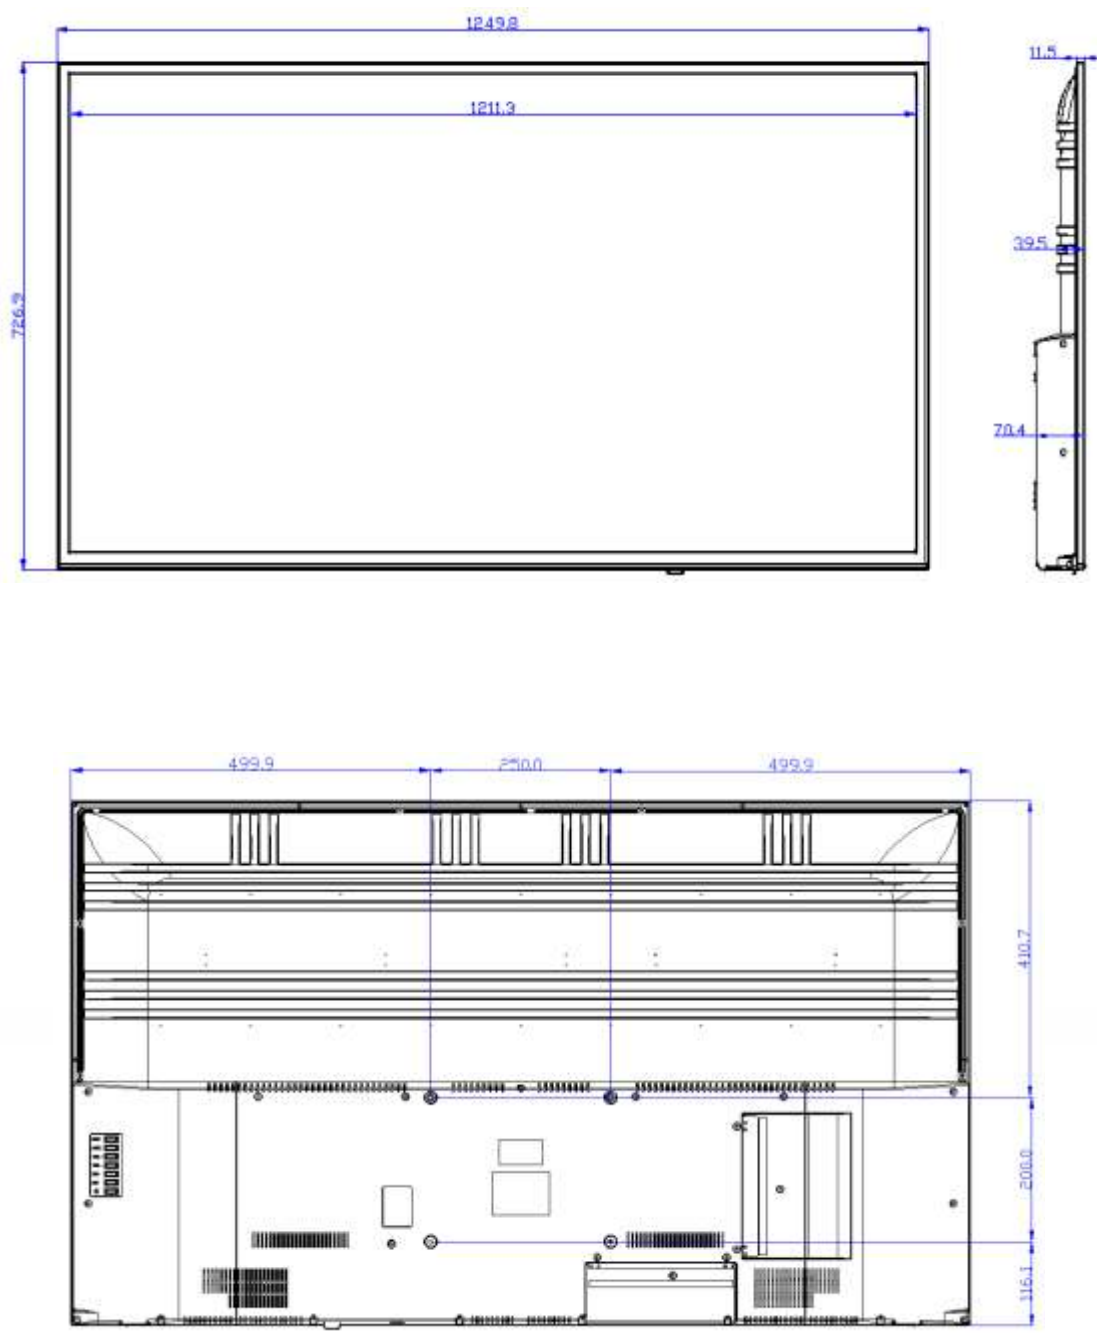

\* Note: we will not inform the modify or upgrade of products.

Unit:mm